

LIGHTHOUSE LEDs

Technical Data Sheet

Product Name: 5mm Diffused Flat Top Wide Angle Cool /
Clear White LED - Wide Angle

Part Number: 5MMFLATTOPDIFFUSEDLEDCOOLWHITE

SKU: 5MMFLATTOPDIFFUSEDLEDCOOLWHITE

Package: 5mm Flat Top

Date: 2026-03-30

Document Control

Prepared by


Checked by

Approved by

1. Features

- Package: 5mm Flat Top
- Color: Ultra Bright Cool/Clear White
- Lens: Diffused In Emitting Color
- Die Material: InGaN
- RoHS Compliant, Lead-Free

2. Outline Dimensions

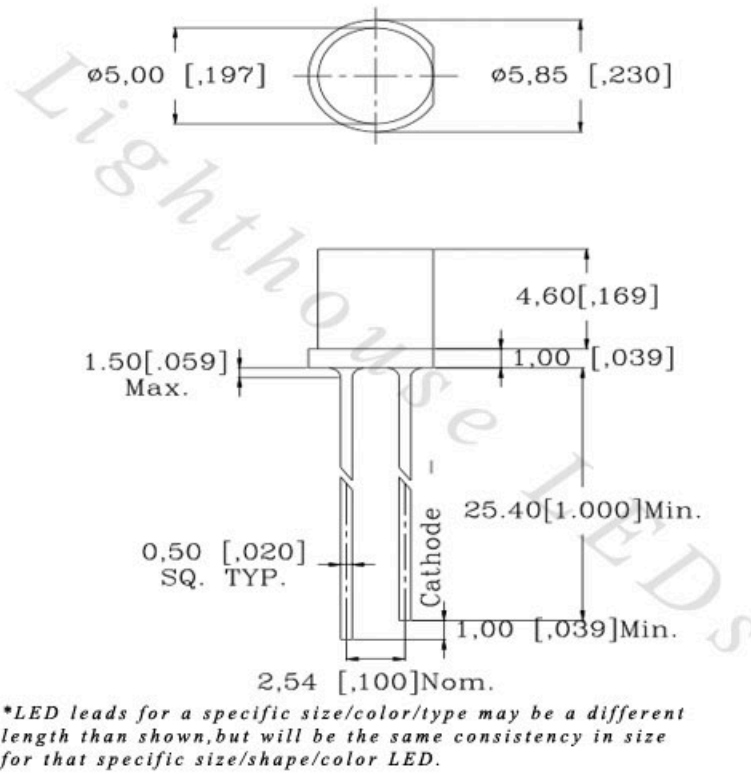

| Unit | Tolerance | Die Material | Lens Color | Emission Color |
|------|-----------|--------------|----------------------------|------------------|
| mm | ±0.2mm | InGaN | Diffused In Emitting Color | Cool/Clear White |

3. Electrical / Optical Characteristics (Ta = 25°C, RH 60%)

| Parameter | Symbol | Test Condition | Min | Typ. | Max | Unit |
|--------------------------|--------|----------------|------|------|-------|------|
| Forward Voltage | VF | IF = 20mA | 3.2 | — | 3.4 | V |
| Reverse Current | IR | VR = 5V | — | — | 5 | μA |
| Luminous Intensity | IV | IF = 20mA | 9000 | — | 11000 | mcd |
| Viewing Angle | 2θ1/2 | IF = 20mA | — | 120 | — | ° |
| Dominant Wavelength | λd | IF = 20mA | — | 460 | — | nm |
| Spectral Line Half-Width | Δλ | IF = 20mA | — | 20 | — | nm |

Remark: Tolerance of intensity ±15%, wavelength ±1nm, forward voltage ±0.05V. For reference only.

4. Absolute Maximum Ratings (Ta = 25°C, RH 60%)

| Parameter | Symbol | Value | Unit | Remark |
|-----------------------|--------|--------------------------------|------|-------------------------|
| Forward Current | IF | 20 | mA | — |
| Peak Forward Current | IFM | 75 | mA | F=1kHz, duty cycle 1/10 |
| Reverse Voltage | VRP | 15 | V | — |
| Power Dissipation | Pd | 85 | mW | — |
| Operating Temperature | Tamb | -25 to +80 | °C | — |
| Storage Temperature | Tstg | -35 to +85 | °C | — |
| Soldering Temperature | Tsol | 320°C wave, 3mm from body, ≤5s | | |

5. Typical Electrical / Optical Characteristic Curves





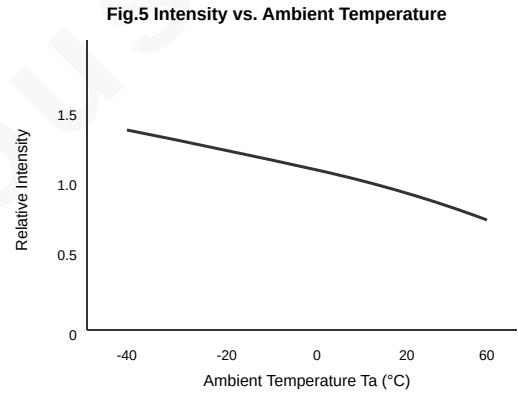


Fig.6 Spatial Distribution (Radiation Pattern)

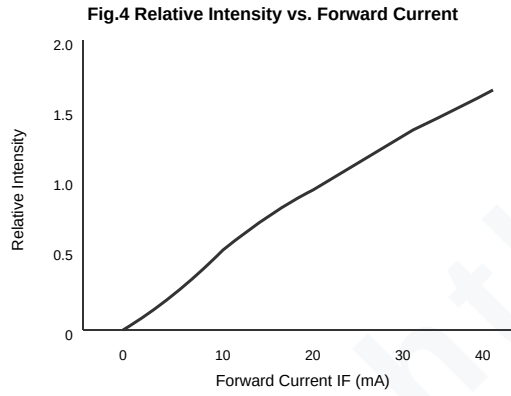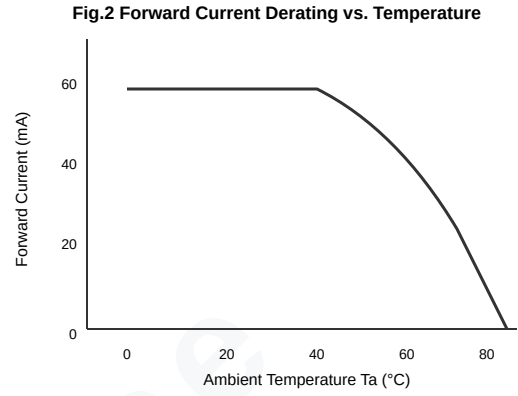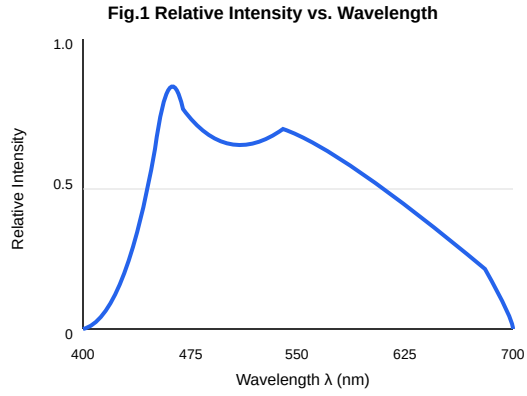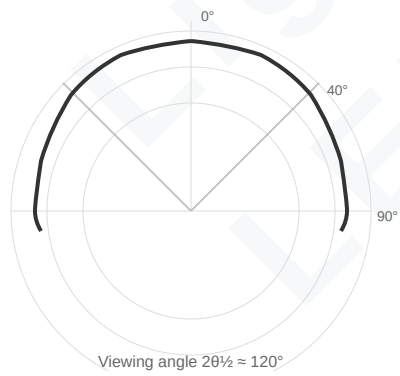

6. Reliability Test Data

| Test | Standard | Conditions | Duration | Qty | Failures |
|--------------------------|--------------------------------|------------------------------|-----------|-----|----------|
| Life Test (room temp) | JIS7021:B4 | Ta = 25°C ±5°C, IF = 30mA | 100 hrs | 22 | 0 |
| High Temperature Storage | JIS7021:B10 / MIL-STD-202:210A | Ta = 85°C ±5°C | 1000 hrs | 22 | 0 |
| Low Temperature Storage | JIS7021:B12 | Ta = -35°C ±5°C | 1000 hrs | 22 | 0 |
| High Temp / Humidity | JIS7021:B11 / MIL-STD-202:103D | Ta = 85°C ±5°C, RH = 85% | 1000 hrs | 22 | 0 |
| Thermal Shock | JIS7021:B4 / MIL-STD-202:107D | -10°C ↔ +100°C, 5min each | 50 cycles | 22 | 0 |
| Temperature Cycling | JIS7021:A3 / MIL-STD-705:105E | -35°C ~ -25°C ~ 85°C ~ -35°C | 50 cycles | 22 | 0 |

7. Application Notes

- Always use a current-limiting resistor. See lighthouseleds.com/blog/led-resistor-calculator.html
- For AC or DCC power, add a bridge rectifier. See lighthouseleds.com/blog/bridge-rectifier-led-ac-dcc-landscape-lighting.html
- Observe polarity: longer lead = anode (+), shorter lead with flat = cathode (-).
- Do not exceed maximum forward current (20mA continuous).

Lighthouse LEDs, LLC — Medical Lake, WA 99022
 lighthouseleds.com — support@lighthouseleds.com — 509-220-7537
Specifications subject to change without notice. Data is for reference only.